


Pode ser montado em FURO LISO ou FURO COM RANHURA.

d_3 é o diâmetro do anel não tensionado.

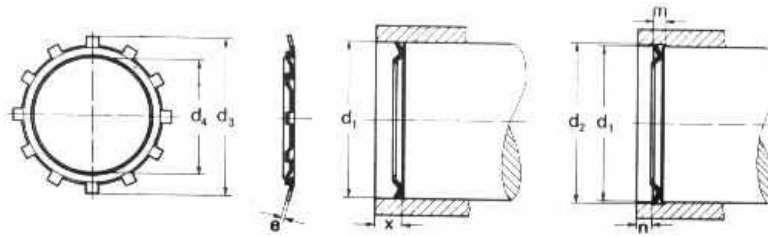

Código Grupo Tecnofix para encomenda	d_1	ANEL					RANHURA				
		e	d_3	d_4	nº. de dentes	Peso (Kg/1000)	d_2	Tol.	m min	n ~	
526.008	8,0	0,25	8,20	4,0	5	0,048	8,10	+ 0,060	0,4	1,0	
526.010	10,0	0,25	10,20	5,0	6	0,068	10,10	+ 0,075	0,4	1,0	
526.011	10,5	0,25	10,70	6,0	6	0,095	10,60	+ 0,075	0,4	1,0	
526.012	12,0	0,25	12,25	6,0	6	0,112	12,10	+ 0,075	0,4	1,0	
526.014	14,0	0,30	14,25	8,0	6	0,172	14,10	+ 0,075	0,5	1,0	
526.015	15,0	0,30	15,25	9,0	6	0,192	15,10	+ 0,075	0,5	1,0	
526.016	16,0	0,30	16,30	10,0	6	0,206	16,15	+ 0,075	0,5	1,5	
526.017	17,0	0,30	17,30	11,0	8	0,236	17,15	+ 0,075	0,5	1,5	
526.018	18,0	0,40	18,30	10,5	8	0,380	18,15	+ 0,110	0,8	1,5	
526.019	19,8	0,50	20,20	11,0	8	0,604	20,00	+ 0,110	0,8	1,5	
526.020	20,0	0,40	20,35	11,0	8	0,512	20,20	+ 0,110	0,8	1,5	
526.022	22,0	0,50	22,35	13,0	8	0,680	22,20	+ 0,110	1,0	2,0	
526.025	25,0	0,50	25,35	16,0	10	0,810	25,20	+ 0,110	1,0	2,0	
526.026	26,0	0,50	26,40	17,0	10	0,856	26,20	+ 0,130	1,0	2,0	
526.028	28,0	0,50	28,40	19,0	10	0,922	28,20	+ 0,130	1,0	2,0	
526.030	30,0	0,50	30,40	21,0	10	1,010	30,20	+ 0,130	1,0	2,0	
526.032	32,0	0,50	32,40	22,5	10	1,210	32,20	+ 0,130	1,0	2,0	
526.035	35,0	0,50	35,40	25,0	10	1,320	35,20	+ 0,130	1,0	2,0	
526.040	40,0	0,50	40,40	30,0	12	1,720	40,20	+ 0,130	1,0	2,0	
526.045	45,0	0,50	45,40	35,0	12	1,830	45,20	+ 0,130	1,0	2,0	
526.050	50,0	0,50	50,50	39,0	12	2,160	50,20	+ 0,130	1,0	2,0	

Utilizar códigos em **Negrito** preferencialmente.
Reservamo-nos ao direito de modificação das dimensões acima sem consulta prévia.